



STORM-LOCK

tile fasteners

THE STORM-LOCK TILE NAIL

DESCRIPTION

The Storm-Lock Tile Nail is a unique fastener used for clay and concrete roof tiles nailed to wood sheathing. The fasteners are approximately 10" long with a 1" nail. They are available with or without a Storm-Lock Nose Hooks. The Storm-Lock Tile Nail will automatically set the head lap and exposure of the tile.

SPECIFICATIONS

Storm-Lock Tile Nail - Stainless Steel - 10" x .120 dia. / type 304 ASTM A 580-90 with 1" nail
Galvanized Steel - 10" x .120 dia. / ASTM A 641-82 with 1" nail
Brass - 10" x .135 dia. / ASTM B 134 with 1" nail
Packaged - 1000 pieces per box


Head Laps - 3", 4", or variable

**Storm-Lock
Tile Nails**



APPLICATIONS

Wood - For installation to wood decks only. Insert the nail end through the nail hole of the tile, then nail the nail end into the deck approximately 6" above head of tile. If booster tiles are used with two piece cap and pan tile, fasten the booster tile and first course tile using a Storm-Lock Tile Nail with Storm-Lock Nose Hook.

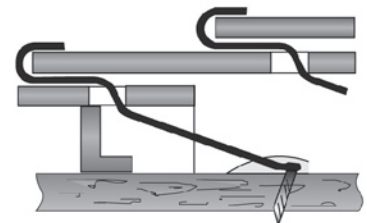

RECOMMENDATIONS

For High wind and high slope conditions, the use of Storm-Lock Tile Nails with Storm-Lock Nose Hook and/or Storm-Lock Side Clips are recommended for the additional prevention of wind and seismic damage.

**Storm-Lock
Side Clip**



**Storm-Lock
Nose Hook**

*** Note*** The specifications/recommendations described above are a guide. Please review local building codes and consult an architect or certified structural engineer for project specific requirements.

**Storm-Lock Tile Fasteners LLC , 1710 S. Balboa St. , Ontario, CA 91761.
(855)383 -1011, (909)930 -1016 Fax (909)930-1216 www.storm-locktilefasteners.com**