



STORM-LOCK Tyle-Tye® Wind Lock Nose Hooks



Also known as "Tile Locks or Butt Hooks", Wind Lock Nose Hooks are for use with clay and concrete roofing tiles to all slopes. They provide a locking device for the butt edge of each cover tile. Tyle-Tye® Wind Lock Nose Hooks achieve greater holding power and are used in high wind designated areas. Tyle-Tye® Wind Lock Nose Hooks are compatible with all methods of tile attachment and are recommended for all roof tiles installed at slopes 7:12 or greater. Available in a squared configuration designed to better fit all different roof tile profiles tightly. Manufactured from type 300 series (.090" dia., 2.3mm) Stainless Steel or 11 gauge (.120" dia, 3mm) Electro-galvanized Steel (10 ga. Brass is available by special request).




Tyle-Tye® Wind Lock Nose Hook attached to shank of standard roofing nail.

STORM-LOCK Tyle-Tye® Hurricane Clips



Also known as "Side Clips, Eave Clips or Wind Clips", the Tyle-Tye® Hurricane Clip is a strap-type locking device for the side edge of several types of roofing tiles. It provides maximum holding power when used in conjunction with Tyle-Tye® Wind Lock Nose Hooks or one of the other STORM-LOCK Tyle-Tye® Systems. Tyle-Tye® Hurricane Clips are suitable for most profiles of clay and concrete roof tiles. Advantages of the Tyle-Tye® Hurricane Clip include excellent holding power and invisibility of the part after installation. Tyle-Tye® Hurricane Side Clips are approved for all slopes. Tyle-Tye® Hurricane Clips are manufactured from 1/2" (13mm) x 18 gauge Electro-galvanized Steel or 1/2" (13mm) x 18 gauge type 304 series Stainless Steel. 1/2" x 18 gauge Brass is available upon special request.

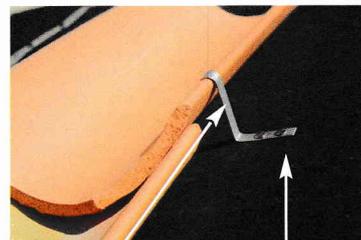

Tyle-Tye® Hurricane Clip
Ideal placement of Tyle-Tye® Hurricane Clip

ALSO AVAILABLE

Copper and Stainless Steel Roofing Nails
Screws for Roof Tile and Tyle-Tye® System



These types of systems have been used for over 80 years to fasten any type of roofing tile, to any type of roof deck and to any slope. Extra tiles or boosters, mortar, staggered exposures, headlaps and other types of roof tile installation designs can be achieved using these multipurpose roof tile fastening systems.

Frances Fasteners Inc., dba STORM-LOCK Tile Fasteners
5180 Western Way, Perris, CA 92571
Toll Free 855.383.1011 • Office 951.657.6777 • Fax 951.657.6770
www.storm-locktilefasteners.com